SELF-PROPELLED SCISSOR LIFTS

GS™-2032 & GS™-2632

Genie
A TEREX COMPANY

Specifications

MODELS	GS™-2032		GS™-2632	
MEASUREMENTS	**Metric**	**US**	**Metric**	**US**
Working height maximum*	8.10 m	26 ft	9.92 m	32 ft
A Platform height maximum	6.10 m	20 ft	7.92 m	26 ft
B Platform length - outside	2.26 m	7 ft 5 in	2.26 m	7 ft 5 in
extended	3.18 m	10 ft 5 in	3.18 m	10 ft 5 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft
C Platform width - outside	81 cm	2 ft 8 in	81 cm	2 ft 8 in
Guardrail height	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in
D Height - stowed: fixed rails	2.13 m	7 ft	———	———
folding guardrails	2.13 m	7 ft	2.26 m	7 ft 5 in
rails folded	1.78 m	5 ft 10 in	1.91 m	6 ft 3 in
E Length - stowed	2.44 m	8 ft	2.44 m	8 ft
Length - extended	3.33 m	10 ft 11 in	3.33 m	10 ft 11 in
F Width	81 cm	2 ft 8 in	81 cm	2 ft 8 in
G Wheelbase	1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
H Ground clearance - centre	9 cm	3.5 in	9 cm	3.5 in
I -with pothole guards deployed	2 cm	0.88 in	2 cm	0.88 in

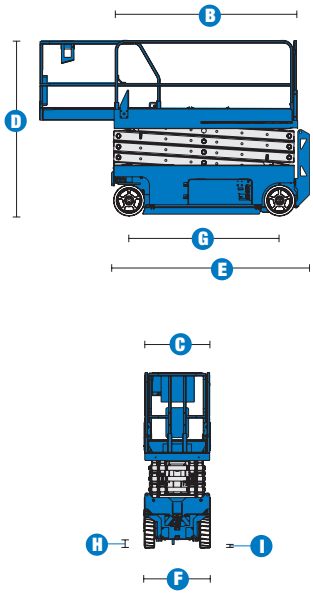

PRODUCTIVITY				
Lift capacity	363 kg	800 lbs	227 kg	500 lbs
Drive speed - stowed	3.5 km/h	2.2 mph	3.5 km/h	2.2 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%	30%	25%	25%
Turning radius - inside	zero	zero	zero	zero
Turning radius - outside	2.13 m	7 ft	2.13 m	7 ft
Raise / lower speed	30 / 34 sec	30 / 34 sec	30 / 40 sec	30 / 40 sec
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - solid non-marking	38 x 13 x 28 cm	15 x 5 x 11 in	38 x 13 x 28 cm	15 x 5 x 11 in

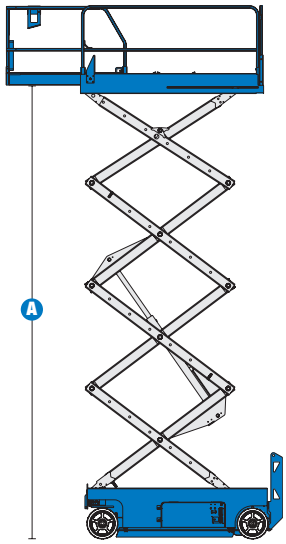

POWER				
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6V 225 Ah batteries)	
Hydraulic system capacity	14.2 L	3.75 gal	14.2 L	3.75 gal

WEIGHT***				
	1,825 kg	4,024 lbs	1,956 kg	4,313 lbs

STANDARDS COMPLIANCE	CE EN280, PB-10-611-03

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
** Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.
*** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2032
- 8.10 m (26 ft) working height
- Up to 363 kg (800 lb) lift capacity

GS™-2632
- 9.92 m (32 ft) working height
- Up to 227 kg (500 lb) lift capacity

PRODUCTIVITY
- 2.26 m x 81 cm (7 ft 5 in x 2 ft 8 in) steel platform
- 91 cm (3 ft) extension deck
- Folding rails with half-height swing gate
- Dual front wheel drive
- Automatic battery charger
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Multiple disc brakes
- Brakes release
- Solid non-marking tyres
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Certified load sensor

POWER
- 24 V (four 6 V 225 Ah batteries)

OPTIONS & ACCESSORIES

PRODUCTIVITY
- Air line to platform
- Dual flashing beacons
- Motion package
- Platform work lights
- Ground controls cover
- Automotive horn

POWER
- Power Inverter
- Maintenance-free batteries
- EE rating

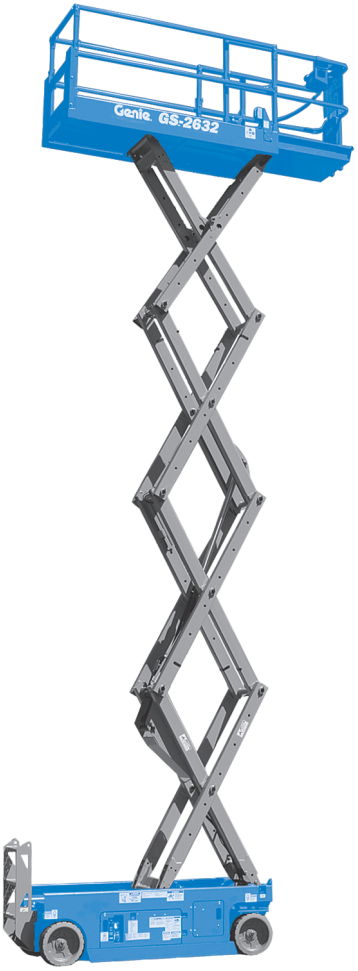

European Offices

UK
The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France
10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +44 (0)2 37 26 09 99
Fax: +44 (0)2 37 26 09 98

Germany
Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-25

Spain
Gaià 31, Pol. Ind. Plá d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia
Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States
18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com
Email: infoeurope@genieind.com

Distributed By:

For further information, please contact your local distributor or the Genie Industries sales office listed. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2006 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a Terex Company.

09/06, Part No. B109378UK