


Specifications

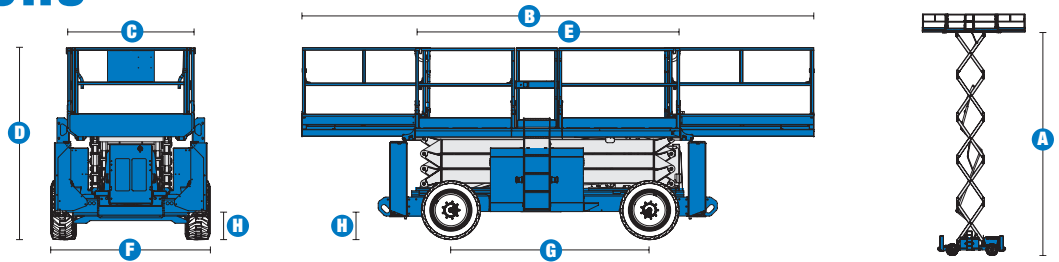

MODELS	GS™-3390 RT		GS™-4390 RT		GS™-5390 RT	
	Metric	US	Metric	US	Metric	US
Working height max*	12.06 m	39 ft	15.11 m	49 ft	18.15 m	59 ft
A Platform height max	10.06 m	33 ft	13.11 m	43 ft	16.15 m	53 ft
B Platform length - outside, extended:						
single deck	5.34 m	17 ft 6.25 in	5.34 m	17 ft 6.25 in	5.34 m	17 ft 6.25 in
dual deck	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in
C Platform width - outside	1.83 m	6 ft	1.83 m	6 ft	1.83 m	6 ft
Platform height - stowed**	1.55 m	5 ft 1 in	1.80 m	5 ft 11 in	2.02 m	6 ft 7.5 in
D Height - stowed	2.71 m	8 ft 10.5 in	2.93 m	9 ft 7.5 in	3.15 m	10 ft 4 in
rails lowered	2.03 m	6 ft 7.75 in	2.25 m	7 ft 4.75 in	2.47 m	8 ft 1.25 in
E Length - stowed:						
single deck	3.94 m	12 ft 11.25 in	3.94 m	12 ft 11.25 in	—	—
dual deck	3.98 m	13 ft .5 in	3.98 m	13 ft .5 in	—	—
with outriggers	4.88 m	16 ft	4.88 m	16 ft	4.88 m	16 ft
Length - extended:						
single deck	5.40 m	17 ft 8.5 in	5.40 m	17 ft 8.5 in	5.40 m	17 ft 8.5 in
dual deck	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in
super deck	7.30 m	24 ft	7.30 m	24 ft	7.30 m	24 ft
F Width -						
standard tyres	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
high flotation tyres	2.57 m	8 ft 5 in	2.57 m	8 ft 5 in	2.57 m	8 ft 5 in
G Wheelbase	2.84 m	9 ft 4 in	2.84 m	9 ft 4 in	2.84 m	9 ft 4 in
H Ground clearance - centre	36 cm	1 ft 2 in	36 cm	1 ft 2 in	36 cm	1 ft 2 in

PRODUCTIVITY						
Lift capacity	1,134 kg	2,500 lbs	680 kg	1,500 lbs	680 kg	1,500 lbs
Drive speed - stowed	8.0 km/h	5.0 mph	8.0 km/h	5.0 mph	8.0 km/h	5.0 mph
Drive speed - raised	1.1 km/h	0.7 mph	1.1 km/h	0.7 mph	1.1 km/h	0.7 mph
Gradeability***	50%		50%		40%	
Turning radius - inside	2.16 m	7 ft 1 in	2.16 m	7 ft 1 in	2.16 m	7 ft 1 in
Turning radius - outside	5.33 m	17 ft 6 in	5.33 m	17 ft 6 in	5.33 m	17 ft 6 in
Controls	proportional		proportional		proportional	
Raise / lower speed	45 / 29 sec		45 / 39 sec		55 / 49 sec	
Tyres - foam-filled rough terrain	30 x 84 cm	12 x 33 in	30 x 84 cm	12 x 33 in	30 x 84 cm	12 x 33 in
Tyres - high flotation air-filled	41 x 84 cm	16 x 33 in	41 x 84 cm	16 x 33 in	41 x 84 cm	16 x 33 in

POWER						
Power source	Deutz diesel F3L 2011 49 hp (36 kW), air cooled					
Fuel tank capacity	113.6 L	30 gal	113.6 L	30 gal	113.6 L	30 gal
Hydraulic system capacity	113.6 L	30 gal	113.6 L	30 gal	113.6 L	30 gal

WEIGHT****						
	5,577 kg	12,295 lbs	6,031 kg	13,296 lbs	7,632 kg	16,826 lbs
Unit weight modifiers for options	The basic unit has one extension deck, no outriggers, CE link guard and CE loadsense					
Outriggers	add 875 kg	1,930 lbs	add 875 kg	1,930 lbs	—	—
Dual Extension decks	add 134 kg	295 lbs				
Super deck	add 195 kg	430 lbs				
High flotation tyres, foam filled	add 294 kg	648 lbs				

STANDARDS COMPLIANCE	CE EN280
----------------------	----------

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Based on RT tyres. Deduct 5.8 cm (2 in) non-marking tyres.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM

- Dual slide-out extension deck package 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- 7.30 m super deck extension package

POWER

- Deutz diesel 49 hp (36 kW)

DRIVE

- 4WD

TYRE OPTIONS

- Foam-filled rough terrain (standard)
- Non-marking, foam filled
- High flotation, foam filled

STANDARD FEATURES

MEASUREMENTS

GS™-3390 RT

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lb) lift capacity

GS™-4390 RT

- 15.11 m (49 ft) working height
- Up to 680 kg (1,500 lb) lift capacity

GS™-5390 RT

- 18.15 m (59 ft) working height
- Up to 680 kg (1,500 lb) lift capacity

PRODUCTIVITY

- 1.52 m (5 ft) slide-out extension deck (GS™-4390)
- Diamond plate deck
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Two self-closing gates
- Electric horn
- Automatic leveling hydraulic outriggers (GS™-5390)
- Tilt sensor with audible alarm
- Descent alarm
- Oscillating axle (GS™-3390)
- Hour meter
- Full-time positive traction control
- Four-wheel drive
- Slide-out engine tray
- Foam-filled rough terrain tyres
- Hydraulic oil cooler
- Fully certified load sensor

STANDARD FEATURES cont.

POWER

- 12 V DC auxiliary power
- Meets current emissions standards



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Dual slide-out extension deck package
- 7.30 m super deck extension package
- Automatic leveling hydraulic outriggers (GS™-3390, -4390)
- Air line to platform
- Platform work lights
- Pipe cradle (pair)
- Dual flashing beacons
- Motion alarm

POWER

- 3500 watt generator (230 V / 50 Hz)
- Cold start packages
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)

European Offices

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-0
Fax: +49 (0)4202 8852-20

Spain

Gaià 31, Pol. Ind. Plà d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com
Email: infoeurope@genieind.com

Distributed By: